



JDSK SERIES Submersible Cutter Sewage Pump



JDSK 2~7.5HP



JDSK 1/3~1 HP



Tungsten edge

Feature:

- Tipped with tungsten cutter to cut off foreign objects and prevent from clogging.

Application:


- Hospital, school, building....etc.
- Wastewater treatment system ; Industrial wastewater and ground water drainage.



Parts and Material List

NO	PART	MTRL
1	Cable	VCT
2	Cable hood	PVC
9	Handle	Nylon 6/SS41
15	Motor cover	Nylon 66/ FC 200
16	Seal housing	FC 200
17	Bracket	FC 200
18	Oil chamber	FC 200
20	Pump casing	FCD 450/ FC 200
21	Impeller	FCD 450
22	Strainer	FCD 450
25	Mech. Seal	CA/CE
26	Oil seal	NBR
41	Cutter edge	Tungsten
52	Bearing	(NTN)
53	Protector	(T.I./YAMADA)
54	Shaft	SUS 410
65	Motor housing	SUS 304


Performance Curve

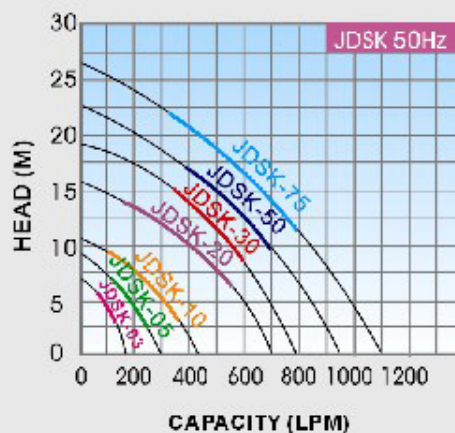






JDSK SERIES Submersible Cutter Sewage Pump

Construction

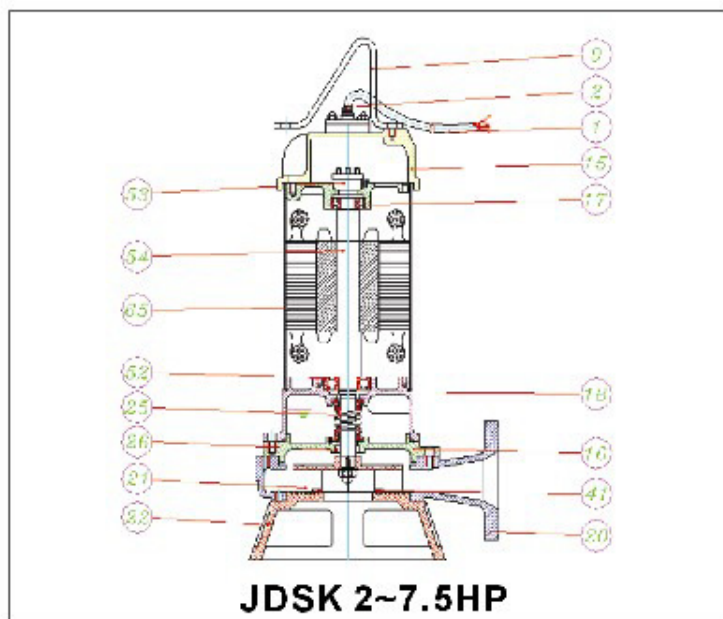

Dimension

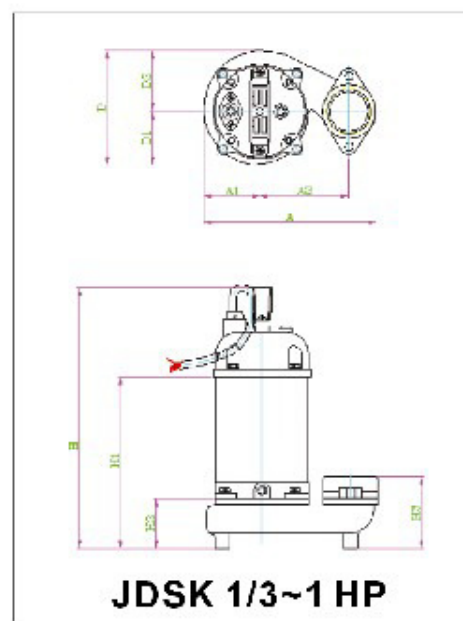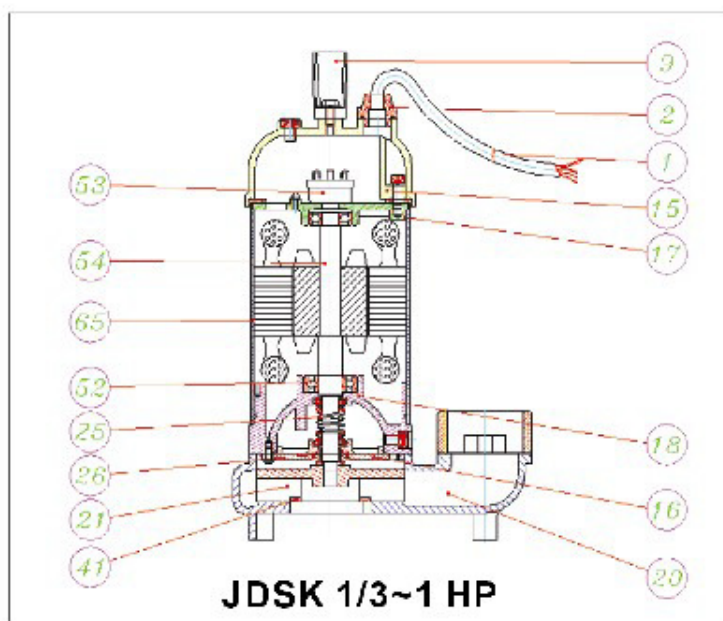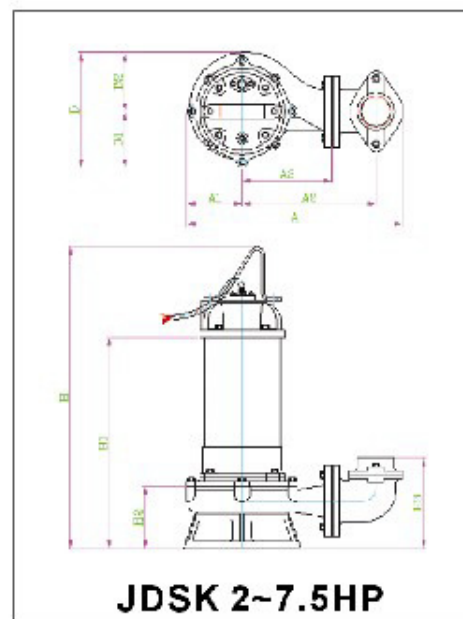

Specifications

Type	Output	Discharge	Phase	Rated		Maximum		Dimension (mm)											Cable
				Head	Capacity	Head	Capacity	A	A1	A2	A3	D	D1	D2	H	H1	H2	H3	
	HP	Inch	φ	M	LPM	M	LPM												
JDSK-C3	1/3	2"	1.3	5	80	9	180	223	73	115	NA	146	68	78	307	220	64	92	5
JDSK-05	1/2	2"	1.3	6	150	9.5	300	223	73	115	NA	146	68	78	332	220	64	92	5
JDSK-10	1	2"	1.3	8	190	11	430	223	73	115	NA	146	68	78	362	250	64	92	5
JDSK-20	2	2"(3")	1.3	10	360	15.5	700	403	103	250	168	212	103	109	560	390	115	168	5
JDSK-30	3	2"(3")	3	11	440	18.5	800	403	103	250	168	212	103	109	580	410	115	168	5
JDSK-50	5	3"(4")	3	8	690	22.5	950	456(539)	110	256(294)	178	227	110	117	610	445	137	225	10
JDSK-75	7 1/2	3"(4")	3	12	750	26.5	1100	456(539)	110	256(294)	176	227	110	117	650	485	137	225	10

Note1: Automatic models are available in single-phase versions.

Note2: Q.D.C. (Quick Discharge Connection) is applied in all models.